



F600 MAX LOAD 500/900 KN

Steel frame fit for unwinding/winding cable drums with the possibility to drive hydraulically the reel by means of the power supplied by a hydraulic power unit.


- No. 2 welded steel frames
- No. 4 supporting rollers on bearings
- Base-Frame arranged for the connection crossbars (See Opt. 950).
- Anchoring and /or fixing points
- No.4 adjustable stabilisers to level the frames (adjustable stroke up to 80 mm)

On request it is possible to change the characteristics of the base-frames.



OPTIONAL DEVICES

- 424x2** No.2 hydraulic motorizations mounted on the rollers (to be fed by hydraulic power unit F306.18.CC)
- 950** Fixed-type crossbars for the connection of the base-frames, suitable for max. 6 - meter wide drums
- 951** Telescopic-type crossbars for the connection of the base-frames, controlled by hydraulic power unit
- 951.1.1** Pair of extensions allowing to adapt the telescopic device to wider drums. Extension length (standard) = 1 m
- 951.1.2** Pair of extensions allowing to adapt the telescopic device to wider drums. Extension length = 2 m
- 955** Device to press the drum sides on the motorized rollers to grant a higher grip. Opt. 424x2 needed. Max drum width 6 m and max drum hole diameter 200 mm

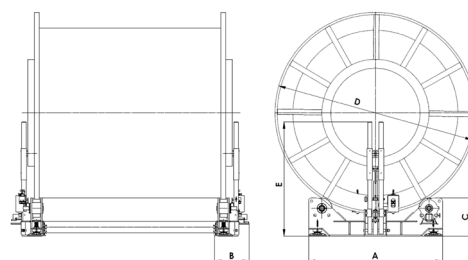

| | Reel diameter (D) min – max | Reel width max ⁽¹⁾ | Dimensions of each frames (A x B x C) | Weight for each base-frame ⁽²⁾ |
|-----------------|--------------------------------|----------------------------------|------------------------------------------|-------------------------------------------|
| | m | m ⁽¹⁾ | m | kg |
| F600.500 | 3,50 – 4,50 | - | 3,50 x 0,70 x 0,70 | 2200 |
| F600.900 | 3,50 - 6,00 | - | 4,50 x 1,00 x 0,90 | 4500 |

⁽¹⁾ Max drum width without Opt. 950/951: unlimited. ⁽²⁾ Weight without optional devices.

| | Max. Capacity (Pair of base-frames) | Braking force ⁽³⁾ | On drum diameter |
|-----------------|----------------------------------------|------------------------------|------------------|
| | daN/Ton | daN ^(*) | mm |
| F600.500 | 50000 / 50 | 4000 | 3500 |
| F600.900 | 90000 / 90 | 5000 | 3500 |

⁽³⁾ powered by hydraulic power units. ^(*) Indicative values, granted only with opt. 955 and 424x2.