




22...1

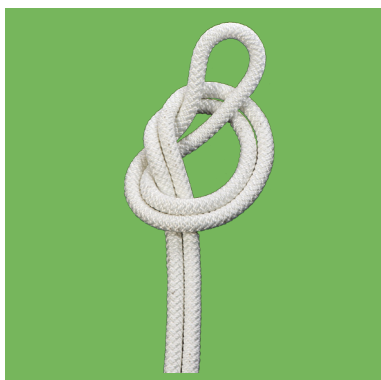

Pilot rope made of an external polyester mesh stocking and a hi-tenacity nylon core. Double torsion. Highly resistant to wear and UV rays. white colour.
Supplied wound up on wooden reels or in coils.


OPTIONAL DEVICES

146.3 Sewn eyes (note: available up to Ø18 mm. The breaking load of the clamped eyes is the same as the breaking load of the rope)

	Nominal diameter	Elongation under tension		Breaking load	Weight	Standard Lengths (*)				
	mm	at 10 % BL ⁽¹⁾	at 30 % BL ⁽²⁾	daN	kg/m	m				
22.06.1	6	4%	7,5%	750	0,027	500	1000	1500	2000	3000
22.08.1	8	4%	7,5%	1.200	0,045	500	1000	1500	2000	3000
22.10.1	10	4%	7,5%	2.000	0,073	500	1000	1500	2000	3000
22.12.1	12	4%	7,5%	3.500	0,115	500	1000	1500	2000	3000
22.14.1	14	4%	7,5%	4.300	0,142	500	1000	1500	2000	
22.16.1	16	4%	7,5%	5.000	0,195	500	1000	1500	2000	
22.18.1	18	4%	7,5%	5.800	0,240	500	1000	1500		
22.20.1	20	4%	7,5%	6.500	0,295	500	1000	1500		
22.22.1	22	4%	7,5%	8.300	0,350	500	900			
22.24.1	24	4%	7,5%	9.500	0,410	500	800			

⁽¹⁾ elongation rate at 10% of breaking load ⁽²⁾ elongation rate at 30% of breaking load

22...2

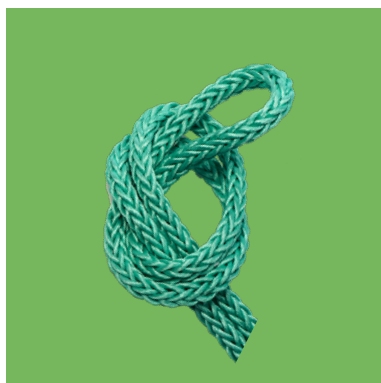

Pilot rope made of polypropylene and polyester hi-tenacity 12-fuses mesh.
Light-weight, waterproof and UV resistant. Easy to splice without any special tool. Green colour. Supplied wound up on wooden reels or in coils.

OPTIONAL DEVICES

146.2 Hand-spliced ends

	Nominal diameter	Elongation under tension	Breaking load	Weight	Standard Lengths (*)
	mm	at 50 % BL ⁽¹⁾	daN	kg/m	m
22.10.2	10	5%	1.500	0,040	1000
22.12.2	12	5%	2.300	0,060	1000
22.14.2	14	5%	2.800	0,075	1000
22.16.2	16	5%	3.300	0,088	1000
22.18.2	18	5%	4.500	0,120	1000
22.20.2	20	5%	5.500	0,150	1000
22.22.2	22	5%	6.200	0,165	800
22.24.2	24	5%	8.500	0,240	800