


F145.S

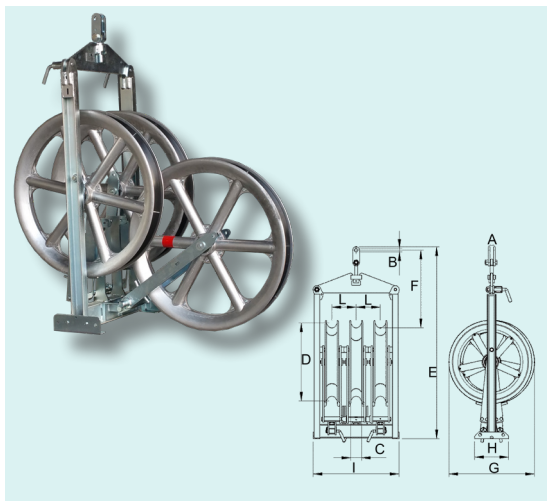


Detachable three-sheave running out block fit for stringing two- three-bundled conductors. The frame contains 3 running-out blocks that can be used singularly. Aluminium sheaves mounted on sealed ball bearings. Grooves lined with nylon sectors. Galvanised steel frame. Central sheave mounted on double bearings. Demountable attachment revolving by 90°.

OPTIONAL DEVICES

- 314 Sheaves lined with aluminium sectors
- 326 Grounding device (opt.314 needed)
- 329 Copper cable, 6-m long, with transparent PVC protection, with a clamp for tower and a terminal for the running out block

	Dimensions (mm)										Working Load	Weight
	A	B	C	D	E	F	G	H	I	L	kN	kg
F145.S.50.68	25	25	68	500	1480	600	630	280	590	148	40	122
F145.S.65.68	25	25	68	650	1550	600	770	280	590	148	40	145
F145.S.65.95	25	30	95	650	1650	600	770	280	670	178	60	165
F145.S.80.68	25	25	68	800	1750	600	900	280	590	148	60	167
F145.S.80.95	25	30	95	800	1750	600	900	300	670	178	60	190
F145.S.100.95	30	30	95	1000	1980	600	1100	300	700	178	67	230

F149.S

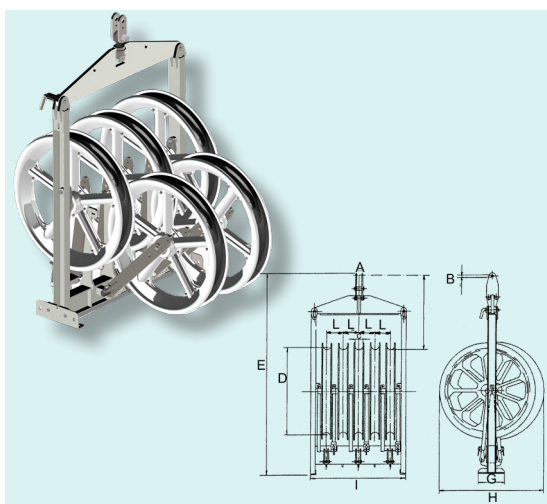

Detachable five-sheave running out block fit for stringing four-bundled conductors. The frame contains 5 running-out blocks that can be used singularly. Aluminium sheaves mounted on sealed ball bearings. Grooves lined with nylon sectors. Galvanised steel frame. Central sheave mounted on double bearings. Demountable attachment revolving by 90°.

OPTIONAL DEVICES

- 314 Sheaves lined with aluminium sectors
- 326 Grounding device (opt.314 needed)
- 329 Copper cable, 6-m long, with transparent PVC protection, with a clamp for tower and a terminal for the running out block

	Dimensions (mm)										Working Load	Weight
	A	B	C	D	E	F	H	G	I	L	kN	kg
F149.S.50.68	25	25	68	500	1480	600	630	280	890	148	40	185
F149.S.65.68	25	25	68	650	1550	600	770	280	890	148	40	210
F149.S.65.95	25	30	95	650	1650	600	770	280	1050	178	60	245
F149.S.80.68	25	25	68	800	1750	600	900	280	890	148	60	249
F149.S.80.95	25	30	95	800	1750	600	900	300	1050	178	60	300
F149.S.100.95	30	30	95	1000	1980	600	1100	300	1070	178	67	328

Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.