


C86.ST

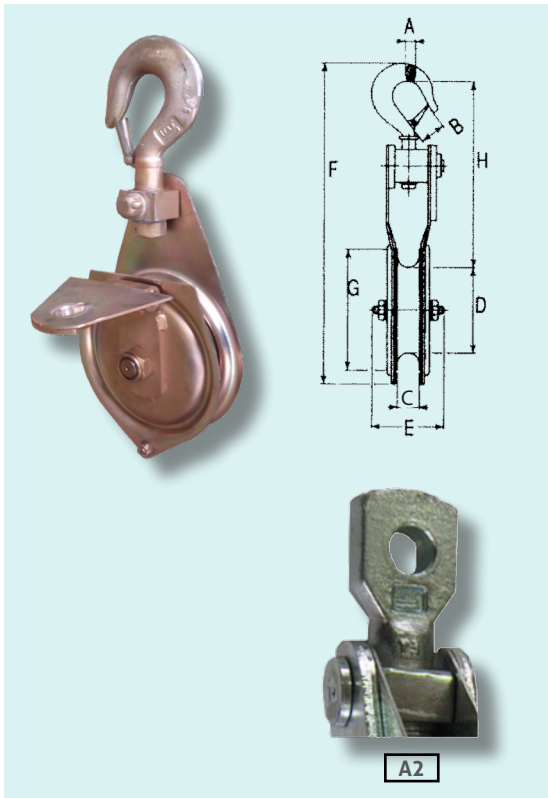


Openable snatch block. Galvanised steel sheave mounted on ball bearings. Galvanised steel frame with openable side. Standard hook attachment.

OPTIONAL DEVICES

eye attachment **A2**

	W.L.L	Max rope	Dimensions (mm)			Weight
	kN	Ø	C	D	G	kg
C86.ST.20.1	30	20	24	120	150	8,8
C86.ST.40.1	50	22	26	130	166	11,1
C86.ST.50.1	80	24	28	160	200	12,6

C86.AL

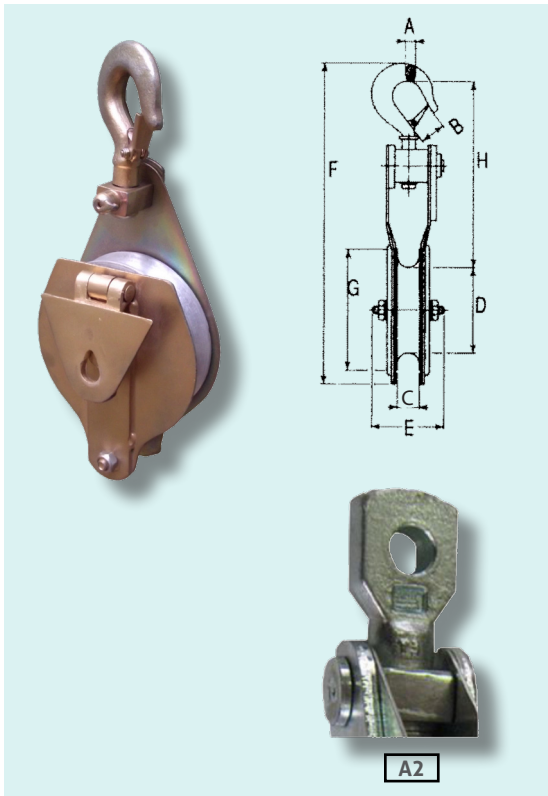

Openable snatch block. Aluminium sheave mounted on ball bearings. Aluminium frame with openable side. Standard steel hook attachment.

OPTIONAL DEVICES

eye attachment **A2**

	W.L.L	Max rope	Dimensions (mm)			Weight
	kN	Ø	C	D	G	kg
C86.AL.6	8	16	20	98	120	1,6
C86.AL.12	12	20	24	130	155	2,8

Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.