


C155.A.2

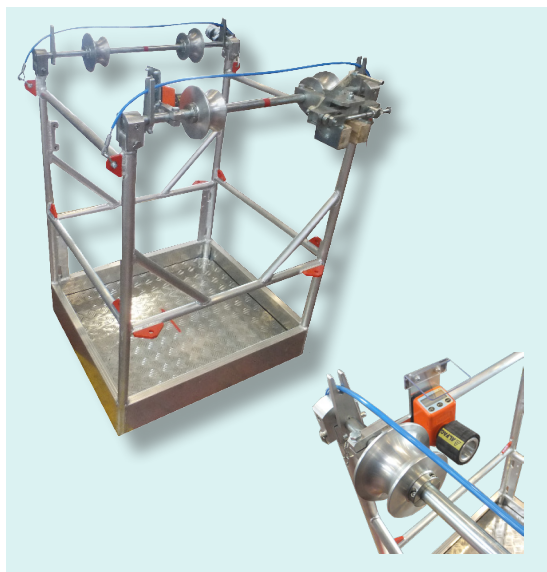


Line-car for twin conductor lines (2 cond.). Made of light alloy structure with nylon wheels mounted on ball-bearings. Stationary brake and metercounter. Also available for 3-bundle lines (3 conductors): mod. **C155.A.3**

FEATURES

Adjustable distance between wheels	400 to 600 mm.
Capacity	600 kg
Weight	48 kg

OPTIONAL DEVICES

02	Aluminium wheels
----	------------------

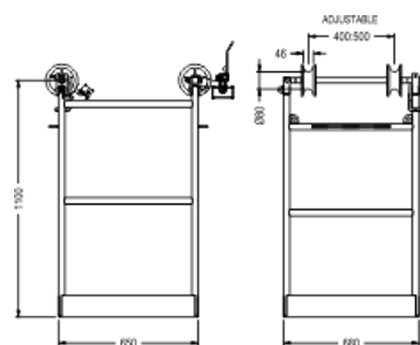

C155.AM.2



Motorized line-car for twin conductor lines (2 cond.). Made of light alloy structure with wulcolan wheels mounted on ball-bearings. Transmission axle with high grip rubber wheels. Stationary brake and metercounter.


Also available for 3-bundle lines (3 cond.): mod. **C155.AM.3**

Also available for 4-bundle lines (4 cond.): mod. **C155.AM.4**

FEATURES

Adjustable distance between wheels	400 to 600 mm
Gasoline engine	2,4 hp, 2 strokes, 48 cc
Speed	0-20 m/min
Max inclination	25%
Mechanical transmission with idle device	
Capacity	100 kg
Weight	82 kg

707 - Negative disk brake, with manual opening

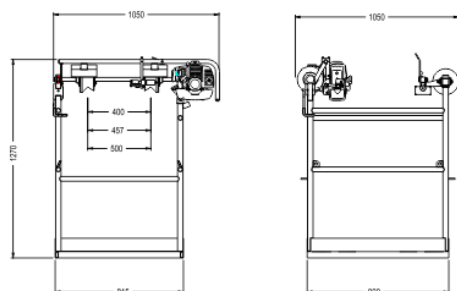

Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.