


HYDRAULIC PULLER

F275.P.40 MAX PULL 40 kN

OMAC
ITALY
SINCE 1954

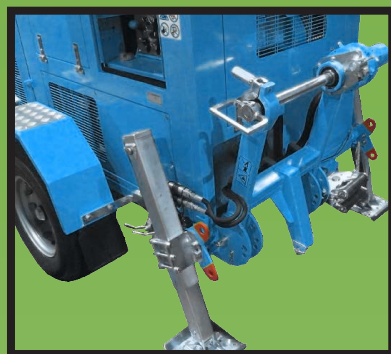

TWIN PULLER

COMBINED SOLUTIONS

Standard trailer winch c/w extra reel-winder (opt. 084)

SELF-LOADED REEL WINDER

Performing cable recovery and service operations

USER-FRIENDLY

Reel winder operated by main panel

PULL PERFORMANCES

Max pull	40 kN
Speed at max pull	16 m/min
Max speed	60 m/min

REEL

Type	extractable
Diameter	750mm
- steel rope Ø 12 mm	1000 m
- steel rope Ø 10 mm	1300 m

OPT. 084

Max pull	8 kN
Max speed	60 m/min

REEL

Diameter	700 mm
Cylindrical or conical	
- steel rope Ø 12 mm	500 m