


C86.ST

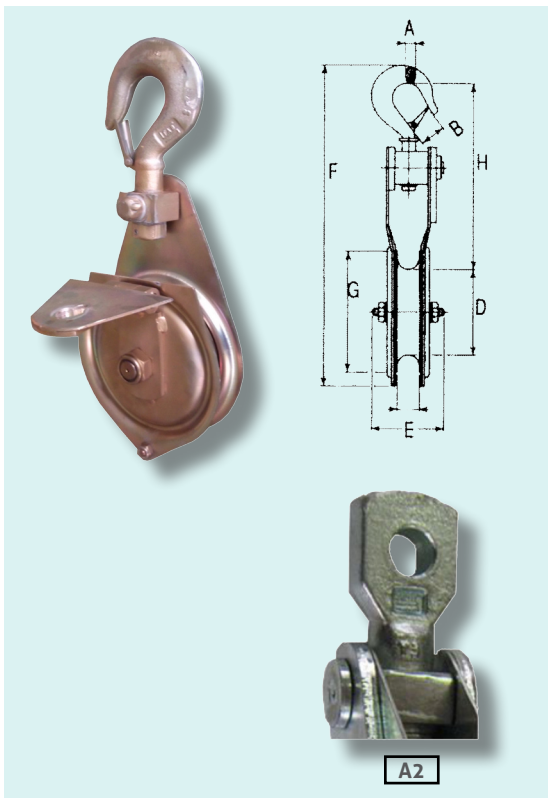


Openable snatch block. Galvanised steel sheave mounted on ball bearings. Galvanised steel frame with openable side. Standard hook attachment.

OPTIONAL DEVICES
eye attachment **A2**

	Working Load	Max rope	Dimensions (mm)							Weight
	kN	Ø	A	B	D	E	F	G	H	kg
C86.ST.20.1	30	20	23	28	102	75	400	132	210	6,5
C86.ST.40.1	50	25	40	45	140	90	475	165	380	10,2
C86.ST.50.1	80	27	45	45	145	115	500	192	410	14,5

C86.AL

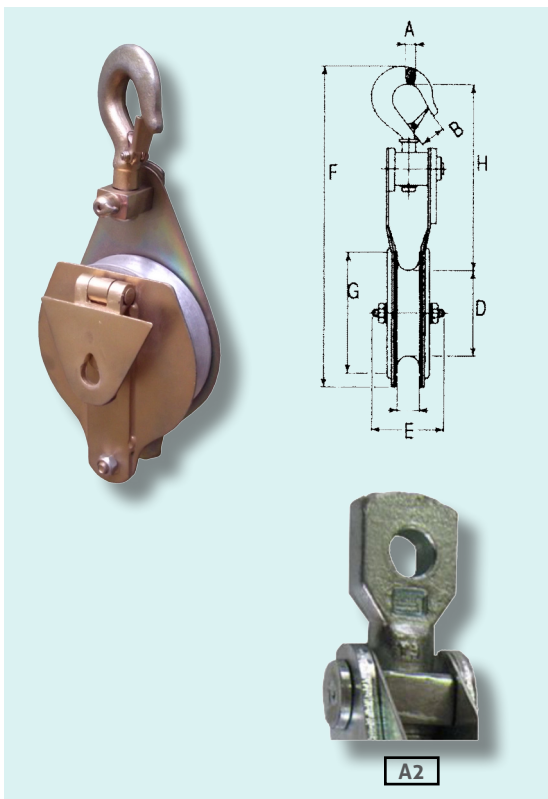

Openable snatch block. Aluminium sheave mounted on ball bearings. Aluminium frame with openable side. Standard steel hook attachment.

OPTIONAL DEVICES
eye attachment **A2**

	Working Load	Max rope	Dimensions (mm)							Weight
	kN	Ø	A	B	D	E	F	G	H	kg
C86.AL.6	8	16	16	16	98	72	300	120	160	1,6
C86.AL.12	12	20	18	25	130	72	320	155	180	2,8

Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.