


# F153..F

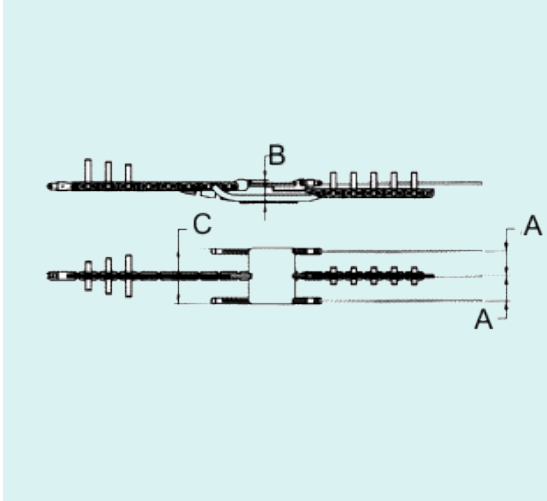

**F153.2...F Fixed type** running board for 2-bundle conductor, fit for connecting the pulling rope to 2 conductors. The running board is made up of:

- 1 swivel joint for the pulling rope
- 2 swivel joints for the conductors


**F153.3...F Fixed type** running board for 3-bundle conductors, fit for connecting the pulling rope to 3 conductors. The running board is made up of:

- 1 swivel joint for the pulling rope
- 3 swivel joints for the conductors

	Cond.	Dimensions (mm)			Joints (model)		Rope for conductors		Working Load	Weight
	(a)	A	B	C	(b)	(c)	Ø mm	length m	kN	kg
F153.2.3.F	2	100	130	250	F250.R.16.1	F250.R.18.1	12	3	65	70
F153.2.1.F	2	146	160	360	F250.R.24.1	F250.R.18.1	16	3,5	95	135
F153.2.2.F	2	174	170	410	F250.R.24.1	F250.R.18.1	16	3,5	95	150
F153.3.3.F	3	100	130	250	F250.R.16.1	F250.R.18.1	12	3	65	75
F153.3.1.F	3	146	160	360	F250.R.24.1	F250.R.18.1	18	3,5	95	150
F153.3.2.F	3	174	170	410	F250.R.24.1	F250.R.18.1	18	3,5	95	170

(a) number of conductors – (b) joint for pulling rope – (c) joint for conductors

# F153

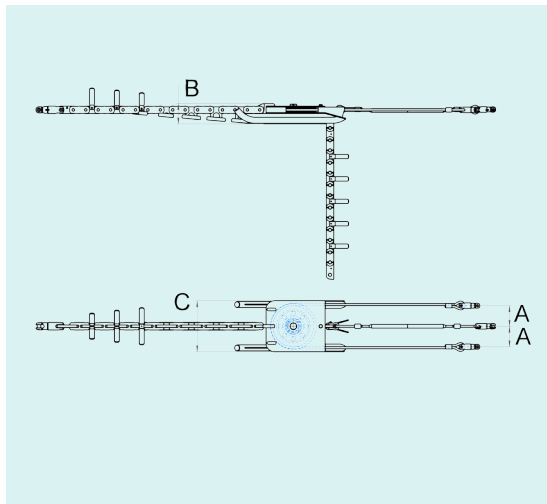

**F153.2 Balanced type** running board for 2-bundle conductors, fit for connecting the pulling rope to 2 conductors.

The running board is made up of:

- 1 sheave with balancing counterweights
- 1 swivel joint for the pulling rope
- 2 swivel joints for the conductors
- 1 length of antitwisting steel rope for balancing the conductors

**F153.3 Balanced type** running board for 3-bundle conductors, fit for connecting the pulling rope to 3 conductors.

The running board is made up of:

- 1 sheave with balancing counterweights
- 1 swivel joint for the pulling rope
- 3 swivel joints for the conductors
- 2 lengths of antitwisting steel rope: 1 for the lateral conductors and 1 for the central conductor

	Cond.	Dimensions (mm)			Joints (model)		Rope for conductors			Working Load	Weight
	(a)	A	B	C	(b)	(c)	Ø mm	(e) m	(f) m	kN	kg
F153.2.1	2	146	160	360	F250.R.24.1	F250.R.16.1	16	30	—	95	140
F153.2.2	2	174	170	410	F250.R.24.1	F250.R.16.1	16	30	—	95	155
F153.2.6	2	100	125	245	F250.R.18.1	F250.R.13.1	12	15	—	65	85
F153.3.1	3	146	160	360	F250.R.24.1	F250.R.18.1	18	30	15	95	155
F153.3.2	3	174	170	410	F250.R.24.1	F250.R.18.1	18	30	15	95	175
F153.3.6	3	100	125	245	F250.R.18.1	F250.R.13.1	12	15	7	65	90

(a) number of conductors – (b) swivel joint for pulling rope – (c) joint for conductors – (e) rope length for external conductors - (f) rope length for central conductor

Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.