


3107.1

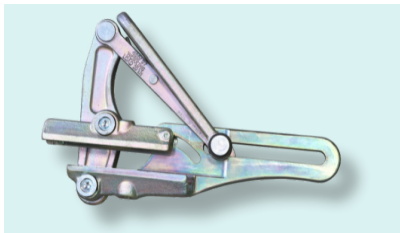

Self-gripping clamps fit for:

- aluminium, ACSR and ACCC, copper conductor: 6-23 mm
- jaws length: 172 mm
- steel rope: 8-13 mm


Interchangeable liners (type G07.A) conductor diameter to be confirmed.

Maximum safety load: 50 kN

Minimum breaking load: 150 kN

Weight: 7 kg

3105.1

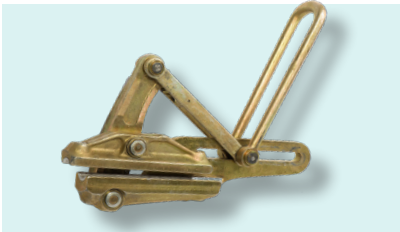

Self-gripping clamps fit for:

- aluminium, ACSR and ACCC, copper conductor: 8-38 mm
- steel conductor and ground wire: 8-22 mm
- jaws length: 272 mm
- steel rope: 8-24 mm


Interchangeable liners (type G05.A) conductor diameter to be confirmed.

Maximum safety load: 75 kN

Minimum breaking load: 225 kN

Weight: 15 kg

3104.1

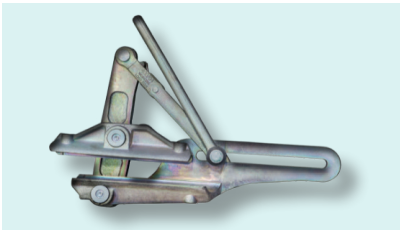

Self-gripping clamps fit for:

- aluminium, ACSR and ACCC, copper conductor: 30-45 mm
- jaws length: 282 mm
- steel rope: 16-28 mm

Interchangeable liners (type G04.A) conductor diameter to be confirmed.

Maximum safety load: 91 kN

Minimum breaking load: 285 kN

Weight: 17 kg

3104.1.L



Self-gripping clamps fit for:

- aluminium, ACSR and ACCC, copper conductor: 23-46 mm
- jaws length: 280 mm

Interchangeable liners (type G04.A) conductor diameter to be confirmed.

Maximum safety load: 91 kN

Minimum breaking load: 320 kN

Weight: 18 kg

3112.1



Self-gripping clamps fit for:

- Ground wires with optical fiber (OPGW) with external diameter 6-23 mm
- Interchangeable liners (type G12TA.1)

Maximum safety load: 49 kN

Minimum breaking load: 180 kN

Weight: 7 kg

G12TA.1 Interchangeable liners in adiprene and aluminium, on demand according to OPGW diameter