

F39



Steel hydraulic presses. Fed by a separate power pack or hand pump.


- Short pressing cycle.
- Maximum flexibility: each press can be used with power unit or hand pump.
- Adjustable pressure-control valve for die closing/opening, with manometer.
- Quick couplings for flexible hoses connection.
- Die-holder for semicircular dies.
- Base with handles.
- Press body can be rotate by 360°.
- Metallic box with handles for transport.

OPTIONAL DEVICES

- 701 Trailer for press and control hydraulic unit mod CIS.01 with rigid axle and drawbar for towing in the job-site.
- 026 Frame with PVC-cover for opt.701.
- 027 Metallic coverage for opt.701.

	Max compression force		Max pressure	Max hexagon	Max stroke	Dimensions L x W x H	Weight
	kN	ton	bar	mm	mm	mm	kg
F39.70.1	700	70	700	52	32	500x210x400	47
F39.100.1	1000	100	700	65	35	500x230x400	49
F39.120.1	1200	120	700	65	40	600x260x450	51
F39.180.1	1800	180	700	90	40	600x450x700	140

Dies and straighteners for presses F39

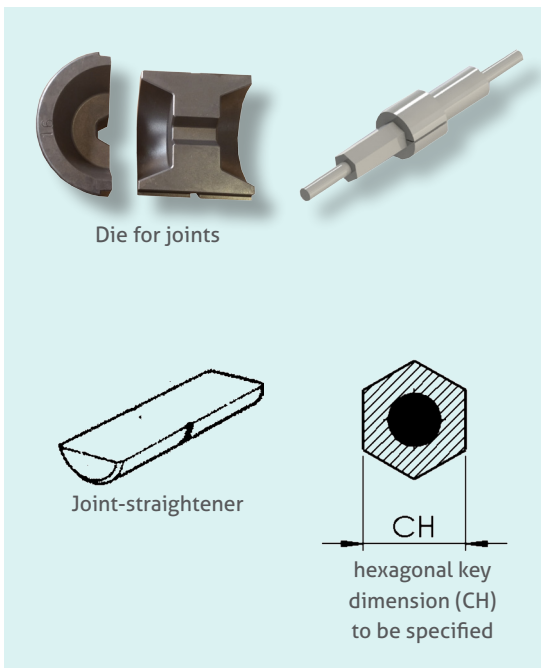

Press	Joint material	Die			Dimensions mm	Weight kg
		Compression type				
		hexagonal	round	tallurit		
F39.70.1	steel-copper aluminum	F39.2585 F39.2586	F39.2587 F39.2588	F39.4949A	Ø 90 x 76	2
F39.100.1 F39.120.1	steel-copper aluminum	F39.2570 F39.2566	F39.2558 F39.2554	F39.4648T	Ø 90 x 80	2
F39.180.1	steel-copper aluminum	F39.2571 F39.2567	F39.2559 F39.2555	F39.4648G	Ø 90 x 80 or Ø 130 x 120	2 6

Press	Code	Joint-straighteners	Weight kg
		Dimensions mm	
F39.70.1	F39.2582	Ø 90 x 170	7
F39.100.1 F39.120.1	F39.2573	Ø 90 x 230	11
F39.180.1	F39.2575	Ø 90 x 230 - Ø 130 x 300	11 - 31

Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.