


# C175

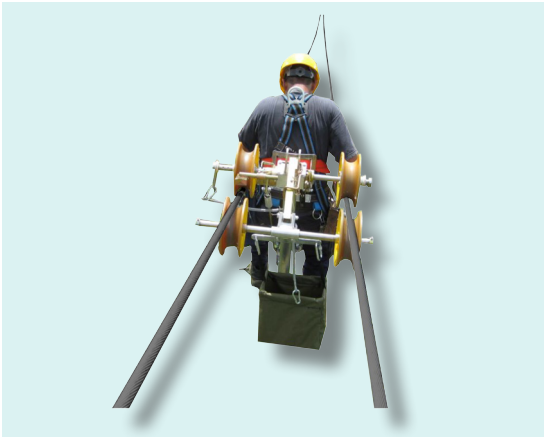

Bicycle for single, twin, 3- and 4-bundle conductor lines.  
Nylon wheels mounted on ball-bearings.

Fit for moving on conductors. Equipped with negative disc brake and a safety brake clamping the conductor, safety belt, and metercounter. Max slope percentage 25%.  
In models C175.2 C175.3 and C175.4, the wheel-distance is adjustable up to 500 mm.  
On demand:

- 01. Bag for spacers.
- 02. Electric motor with battery, speed 15 m/min, 3-hours autonomy circa, weight 19 kg <sup>(1)</sup>.
- 03. Wheel-distance adjustable up to 600 mm <sup>(1)</sup>.
- 04. Gasoline engine 2 hp, speed 0 to 20 m/min max, weight 15 kg <sup>(1)</sup>.
- 05. Container for transporting and storing.

<sup>(1)</sup> available for mod. C175.2 C175.3 and C175.4



			Capacity	Dimensions	Weight
			kg	m	kg
C175.1	for single conductor lines	●	100	1,15 x 0,50 x 1,81	26
C175.2	for twin conductor lines <sup>(1)</sup>	● --- ●	100	0,75 x 0,70 x 1,40	34
C175.3	for 3-bundle conductor lines <sup>(1)</sup>	● --- ●   ●	100	0,70 x 0,60 x 1,40	40
C175.4	for 4-bundle conductor lines <sup>(1)</sup>	● --- ●       ● --- ●	100	1,60 x 0,70 x 1,50	49

Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.