


C158

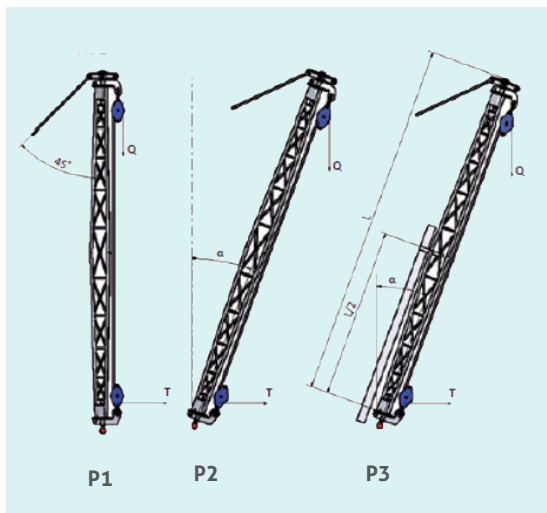

Gin poles made of aluminium alloy tubular structure welded with TIG system.

Made of two or more separated sections.


Working Capacity: 1000 to 10000 daN (note: the real capacity depends on the angle of use).

Available with external wire-rope passage (standard) or internal wire-rope passage (optional).

Complete of swivelling head, base with ground plate and base hook for tower attachment.

OPTIONAL DEVICES

C158....INT Device for internal wire-rope passage

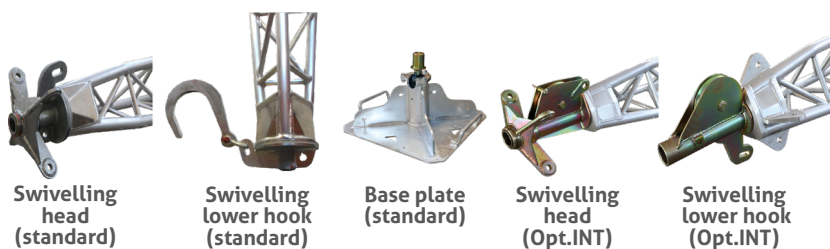

	Capacity (P = Q + T)			Total length m	Sections		Weight		Weight of the base kg
	P1 a=0°	P2 a=20°	P3 a=20°		Number	Lengths m	Standard version kg	.INT version kg	
	daN	daN	daN						
C158.100.062	1000	600	240	6	2	3+3	43	54	11.5
C158.100.082				8	2	4+4	54	66	
C158.150.082				8	2	4+4	65	74	
C158.150.102	1500	900	360	10	2	5+5	76	87	16
C158.150.123				12	3	4+4+4	86	98	
C158.200.082				8	2	4+4	67	75	
C158.200.103	2000	1200	480	10	3	4+2+4	80	88	16
C158.200.123				12	3	4+4+4	91	99	
C158.300.082				8	2	4+4	74	79	
C158.300.123	3000	1800	720	12	3	4+4+4	109	117	25
C158.300.164				16	4	4+4+4+4	146	155	
C158.400.103				10	3	4+2+4	98	116	
C158.400.123	4000	2500	960	12	3	4+4+4	113	131	25
C158.400.164				16	4	4+4+4+4	166	182	
C158.400.204				20	4	5+5+5+5	208	225	
C158.500.123	5000	3000	1200	12	3	4+4+4	139	152	35
C158.500.164				16	4	4+4+4+4	208	221	
C158.500.204				20	4	5+5+5+5	266	278	
C158.700.123	7000	4200	1680	12	3	4+4+4	160	198	35
C158.700.164				16	4	4+4+4+4	210	245	
C158.700.204				20	4	5+5+5+5	245	283	
C158.1000.164	10000	6000	2400	16	4	4+4+4+4	241	278	76
C158.1000.204				20	4	5+5+5+5	291	325	
C158.1000.244				24	4	6+6+6+6	350	385	

Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.