


C167

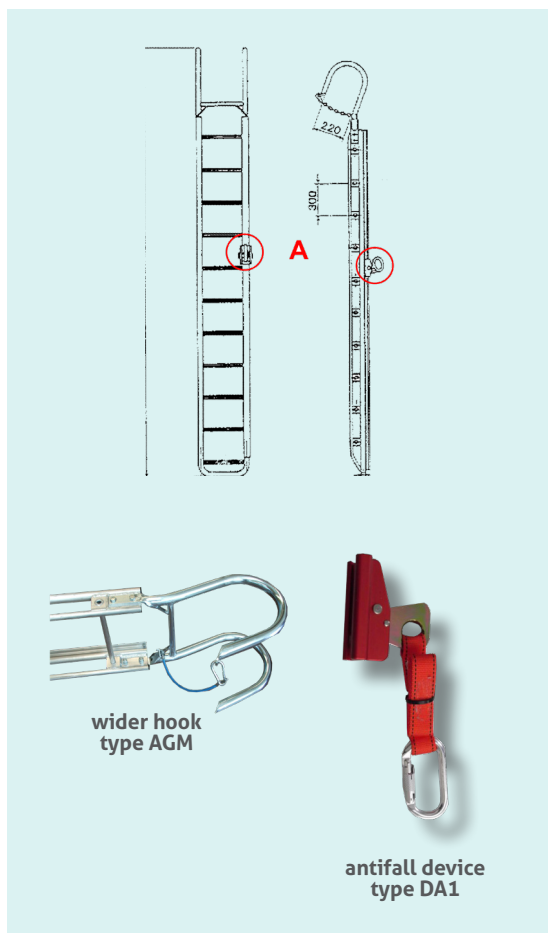

Ladder fit for vertical suspension, for working on transmission towers.
Aluminium alloy construction, TIG welded, in one length or more separated sections to facilitate the transport. Hook complete with steel safety cable.

Vertical working capacity: 300 daN

OPTIONAL DEVICES

- DA1 Antifall device complete with fall absorber, nylon tape and carabiner (part 'A')
AGM Wider hook opening (up to 400 mm)

	Total length (L)	Sections	Weight (vers. AS)
	m	No.	kg
C167.AS.251	2,5	1	10
C167.AS.301	3	1	11,5
C167.AS.351	3,5	1	12,5
C167.AS.401	4	1	13,8
C167.AS.501	5	1	17
C167.AS.601	6	1	20
C167.AS.602	6 (4+2)	2	20,4
C167.AS.802	8 (4+4)	2	26,4
C167.AS.1002	10 (5+5)	2	32,3

Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.