


C167.F

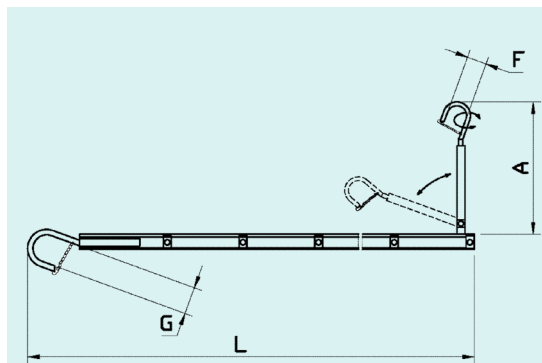

Suspension ladder fit for vertical or horizontal use.

Aluminum alloy structure welded with TIG system, complete with T profile for anti-fall device.

Interchangeable tower hook made of galvanized steel. The foldable end with conductor hook allows to use the ladder as a horizontal platform.

Also available C167.F...S version, working load 200 daN.

OPTIONAL DEVICES

- 01 Conductor hook complete with nylon sheave
- DA1 Antifall device

FEATURES

Vertical working load	300 daN
Horizontal working load	100 daN
	G=220 mm
Dimensions:	F=100 mm
	A=900 mm



Opt. DA1



Opt. 01

	Total length (L)	No. of parts	Weight
	m		kg
C167.F.251	2,5	1	12,2
C167.F.301	3	1	13,5
C167.F.351	3,5	1	14,8
C167.F.401	4	1	16,2
C167.F.501	5	1	18,8
C167.F.601	6	1	21,5
C167.F.602	6 (4+2)	2	22,5

Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.