


# C167.G

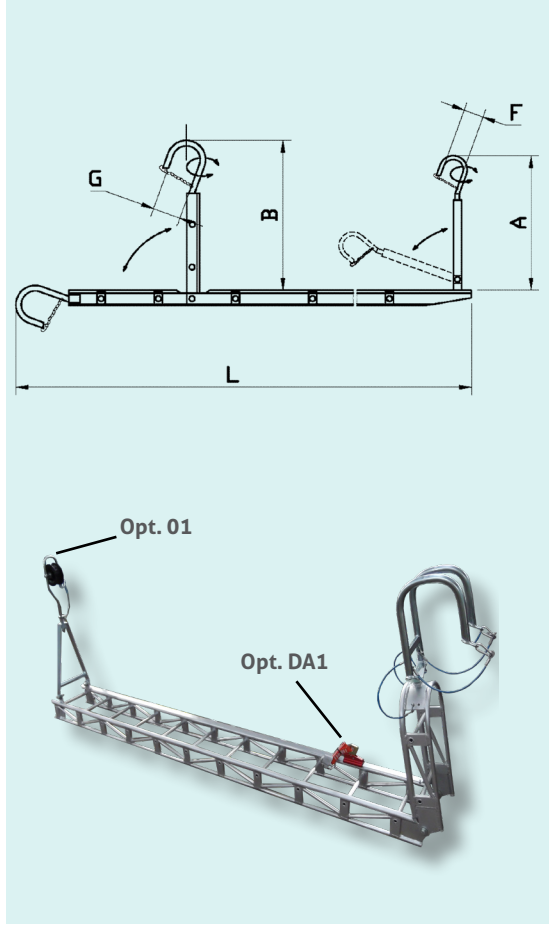

Suspension ladder fit for vertical and horizontal use.  
Aluminum alloy structure welded with TIG system, complete with T profile for anti-fall device. The two foldable ends, fitted with hooks for tower and for conductor, allow to use the ladder as a horizontal platform.

Also available C167.G...S version, working load 200 daN.

### OPTIONAL DEVICES

- 01 Conductor hook complete with nylon sheave
- DA1 Antifall device

FEATURES	
Vertical working load	300 daN
Horizontal working load	100 daN
	G=220 mm
	B=1000 mm
	F=100 mm
	A=900 mm

	Total length (L)	No. of parts	Weight
	m		kg
C167.G.301	3	1	19
C167.G.351	3,50	1	21
C167.G.401	4	1	22,5
C167.G.501	5	1	26,5
C167.G.601	6	1	32,5
C167.G.602	6 (4+2)	2	33,5

Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.