
C161



Anchoring ladder made of light aluminum alloy, with steps made of antislipping material and suspension hooks in hot-dip galvanized steel. The ladder is complete with a fix hook for tower, 220mm opening, and a swivel hook for leaning on the conductor, to use the ladder in horizontal position. The ladders have trapezoidal shape.

OPTIONAL DEVICES

01 Hook for conductor complete with nylon pulley

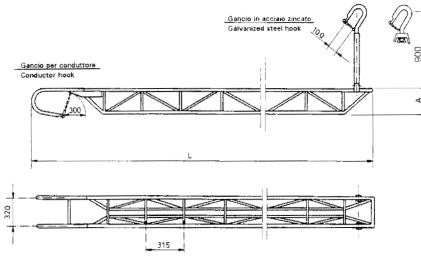

	Total length (L)	Sections number	Dimension A	Max horizontal working load	Max vertical working load	Weight
	m	N.	mm	kN	kN	kg
C161.TP.351	3,5	1	320	3	3	19
C161.TP.401	4,0	1	320	3	3	21
C161.TP.451	4,5	1	320	3	3	23
C161.TP.501	5	1	320	3	3	24,5
C161.TP.601	6	1	350	3	3	28
C161.TP.602	6 (4+2)	2	350	3	3	29,5
C161.TP.702	7 (4+3)	2	350	3	3	34,5
C161.TP.802	8 (4+4)	2	350	3	3	39

Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.

