F144.1

Single sheave running out block fit for stringing one conductor. Nylon sheaves mounted on sealed ball bearings. Galvanised steel frame. Demountable attachment revolving by 90° (available with narrow wheel).

OPTIONAL DEVICES

320 Cage for stocking and transport

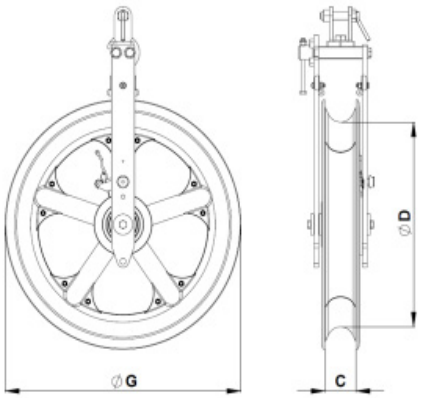

	Dimensions (mm)			W.L.L	Weight
	C	D	G	kN	kg
F144.1.35.60	60	350	440	20	15
F144.1.56.78	78	560	660	40	41
F144.1.64.88	88	640	750	40	45
F144.1.80.97	97	800	916	50	63

F145.1

Three-sheave running out block fit for stringing two- three-bundled conductors. Nylon sheaves mounted on sealed ball bearings. Galvanised steel frame. Demountable attachment revolving by 90° (available with narrow wheel).

OPTIONAL DEVICES

320 Cage for stocking and transport
339 Steel central sheave

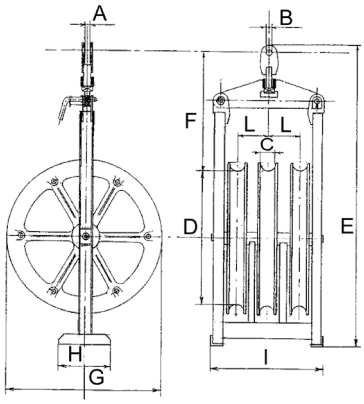

	Dimensions (mm)						W.L.L	Weight
	C	D	G	L	I	E	kN	kg
F145.1.40.78	78	408	508	104	440	1000	40	52
F145.1.56.88	88	560	660	114	470	1200	50	83
F145.1.64.88	88	640	750	114	470	1350	60	93
F145.1.70.98	98	710	822	125	505	1450	75	122
F145.1.80.98	98	800	916	125	505	1550	80	128

Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.