F144 - F150

Single sheave running out block fit for stringing one conductor. Aluminium sheave mounted on sealed ball bearings. Groove lined with nylon sectors. Openable galvanised steel frame with non-fleeting device. Standard swivelling fork attachment.

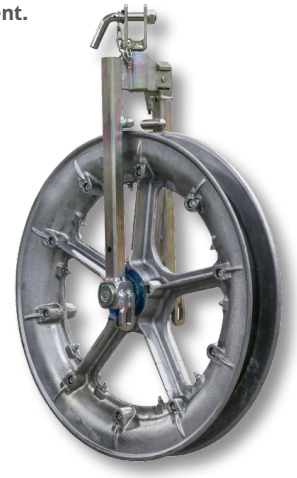

OPTIONAL DEVICES

- **301.2** Fix hook (code FT)
- **301.1** Swivelling hook attachment (code GG)
- **314** Bottom groove lined with aluminium sectors (only for sheaves with groove width E= 60, 68 and 95 mm)
- **327** Non-fleeting device as big as half wheel circumference
- **326** Grounding device (only for wheels with groove width E=60, 68 and 95 mm;opt.314 needed)
- **329** Copper cable, 6-m long, with transparent PVC protection, with a clamp for tower and a terminal for the running out block (for opt.326)
- **320** Box for transport and stocking

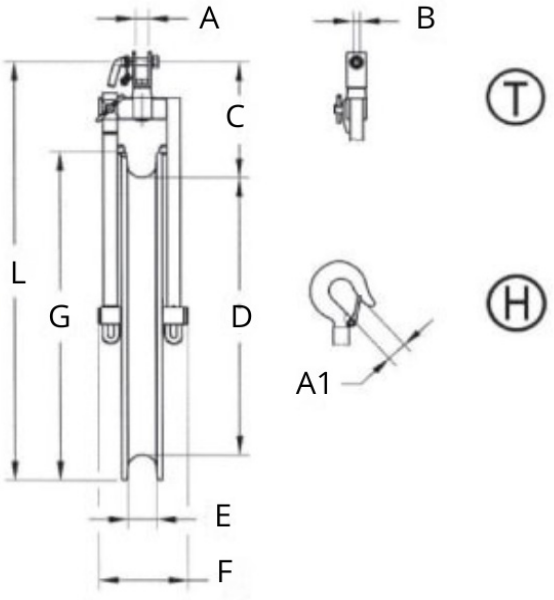



opt.327



F144 with opt.326+328



optional swivelling hook (cod. GG)

	Dimensions (mm)									W.L.L	Weight
	A	A1	B	C	D	E	F	G	L	kN	kg
F150.23.1	21	25	12	155	230	38	140	300	420	20	4
F150.35	21	25	12	164	350	48	176	440	559	20	9
F144.50.70	30	-	16	274	500	68	200	620	834	33	21,5
F144.65.70	30	-	16	274	650	68	200	755	969	40	26
F144.65.95	41	-	18	300	650	95	231	775	1005	40	33
F144.80.70	30	-	16	274	800	68	198	890	1104	40	33
F144.80.95	41	-	18	333	800	95	228	910	1173	40	42,5
F144.100.95	41	-	20	356	1000	95	250	1110	1400	60	50
F144.120.130	36	-	24	379	1200	130	2C88	1350	1639	100	112

Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.