F145

Three-sheave running out block fit for stringing two- three-bundled conductors. Aluminium sheaves mounted on sealed ball bearings. Grooves lined with nylon sectors. Galvanised steel frame with non-fleeting devices on lateral sheaves. Demountable attachment revolving by 90° (available with tight wheel).

OPTIONAL DEVICES

- **314** Sheaves lined with aluminium sectors
- **320** Cage for stocking and transport
- **326** Grounding device (opt.314 needed)
- **329** Copper cable, 6-m long, with transparent PVC protection, with a clamp for tower and a terminal for the running out block (opt.326)
- **325** Reinforced central sheave with total working load 80 kN (for mod. F145.80.95 F145.100.95 only)
- **330** Central sheave with groove width 95 mm (for models F145. xx.68 e F149 xx.68).
- **327.1** Non-fleeting device between the central wheel and the lateral ones

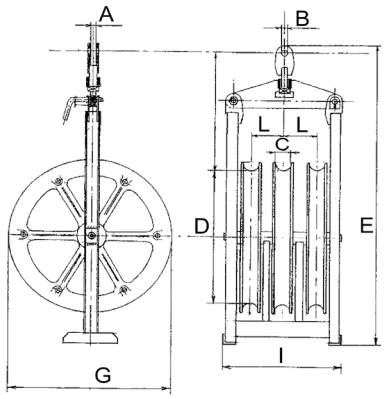

	Dimensions (mm)								W.L.L	Weight
	A	B	C	D	E	G	I	L	kN	kg
F145.50.68	26	25	68	500	1277	620	521	145	40	90
F145.65.68	26	25	68	650	1412	755	521	145	60	105
F145.65.95	26	25	95	650	1487	755	611	175	60	130
F145.80.68	26	25	68	800	1597	890	525	145	60	138
F145.80.95	26	25	95	800	1653	910	615	175	60	163
F145.100.95	26	25	95	1000	1893	1110	627	175	66	187
F145.120.130	26	25	130	1200	2133	1350	761	222	100	365

Larger diameters on demand. (1) With opt.325 working load 80 kN. Weight F145.80.95=165 kg; F145.100.95=218 kg

F149

Five-sheave running out block fit for stringing four-bundled conductors. Aluminium sheaves mounted on sealed ball bearings. Grooves lined with nylon sectors. Galvanised steel frame with non-fleeting devices on lateral sheaves. Demountable attachment revolving by 90° (available with tight wheel).

OPTIONAL DEVICES

- **314** Sheaves lined with aluminium sectors
- **320** Cage for stocking and transport
- **326** Grounding device (opt.314 needed)
- **329** Copper cable, 6-m long, with transparent PVC protection, with a clamp for tower and a terminal for the running out block (opt.326)
- **325** Reinforced central sheave with total working load 80 kN (for mod. F145.80.95 F145.100.95 only)
- **330** Central sheave with groove width 95 mm (for models F145. xx.68 e F149 xx.68)
- **327.1** Non-fleeting device between the central wheel and the lateral ones

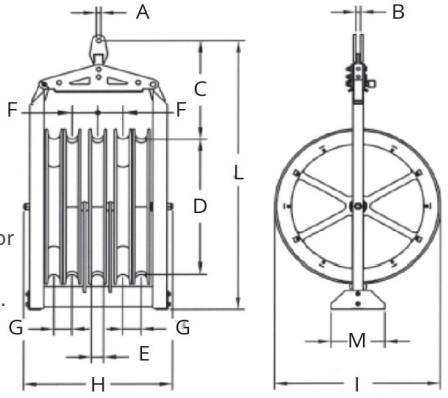

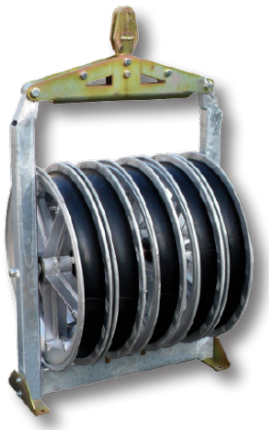

	Dimensions (mm)										W.L.L	Weight
	A	B	C	D	E	F	G	H	I	L	kN	kg
F149.50.68	25	26	632	500	68	145	100	721	620	1378	40	140
F149.65.68	25	26	632	650	68	145	100	721	755	1513	60	160
F149.65.95	25	26	673	650	95	175	145	901	775	1553	60	190
F149.80.68	25	26	633	800	68	145	100	725	890	1648	60	175
F149.80.95	25	26	673	800	95	175	145	905	910	1688	60	247
F149.100.95	25	26	668	1000	95	175	145	917	1110	1893	66	280
F149.120.130	25	26	671	1200	130	222	185	1131	1350	2133	100	545

Larger diameters on demand. (1) With opt.325 working load 80 kN. Weight F149.80.95=250 kg; F149.100.95=290 kg

Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.