F144...E - F150...E

Single sheave block fit for stringing a pilot rope by helicopter. Proper devices allow to position the pulling rope in the sheave groove and keep it inside the groove during stringing operations. Aluminium sheave mounted on waterproof bearings. Groove lined with nylon sectors. Galvanized steel frame. Fix attachment.

OPTIONAL DEVICES

314 Sheaves lined with aluminium sectors
326 Grounding device (opt.314 needed)
327 Non-fleeting device on half wheel circumference
329 Copper cable, 6-m long, with transparent PVC protection, with a clamp for tower and a terminal for the running out block (opt.326)

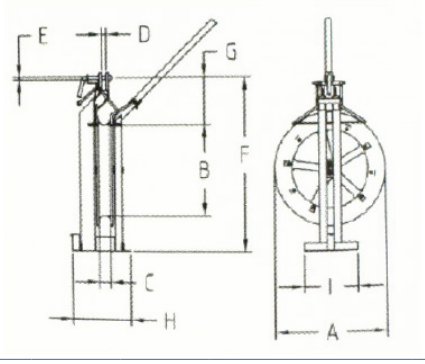

	Dimensions (mm)									W.L.L	Weight
	A	B	C	D	E	F	G	H	I	kN	kg
F150.23.50.E	300	230	41	20	16	560	215	200	200	26	12
F150.35.60.E	440	350	48	20	16	700	235	245	300	26	20
F144.50.70.E	620	500	68	25	20	1130	404	325	300	33	45
F144.65.70.E	755	650	68	25	20	1265	404	277	300	40	50
F144.65.95.E	775	650	95	25	20	1278	418	306	300	40	60
F144.80.70.E	890	800	68	25	20	1401	406	277	300	40	57
F144.80.95.E	910	800	95	25	20	1414	419	310	300	40	65
F144.100.95.E	1110	1000	95	25	20	1614	416	330	500	60	99

F145...E

Three-sheave block fit for stringing a pilot rope by helicopter. Proper devices allow to position the pulling rope in the sheave groove, and keep it inside the groove during stringing operations. Aluminium sheave mounted on waterproof bearings. Groove lined with nylon sectors. Galvanized steel frame. Fix attachment.

OPTIONAL DEVICES

314 Sheaves lined with aluminium sectors
326 Grounding device (opt.314 needed)
329 Copper cable, 6-m long, with transparent PVC protection, with a clamp for tower and a terminal for the running out block (opt.326)

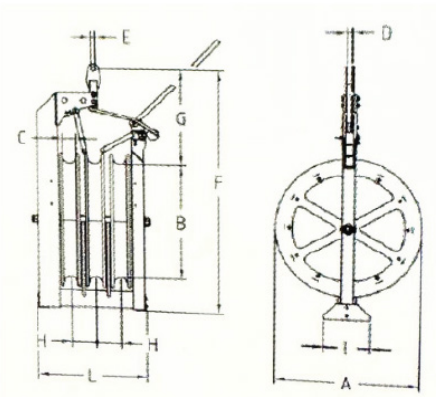

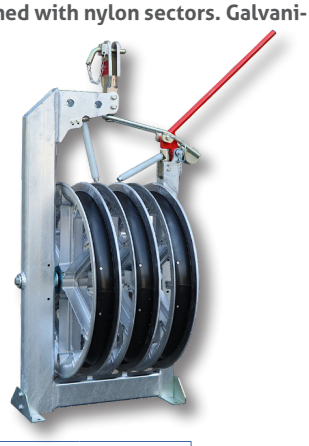

	Dimensions (mm)										W.L.L	Weight
	A	B	C	D	E	F	G	H	I	L	kN	kg
F145.50.70.E	620	500	68	25	26	1400	674	145	300	654	40	115
F145.65.70.E	755	650	68	25	26	1533	674	145	300	654	60	154
F145.65.95.E	775	650	95	25	26	1570	704	175	300	744	60	175
F145.80.70.E	890	800	68	25	26	1678	674	145	300	654	60	177
F145.80.95.E	910	800	95	25	26	1708	704	175	300	744	60	205
F145.100.95.E	1110	1000	95	25	26	1908	704	175	500	744	66	248

Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.