3107.1

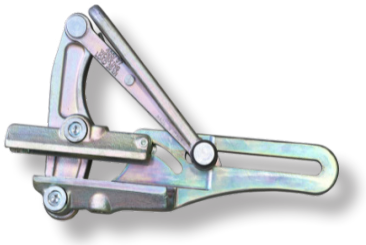

Self-gripping clamps fit for:
- aluminium, ACSR and ACCC, copper conductor: 6-23 mm
- jaws length: 172 mm
- steel rope: 8-13 mm

Interchangeable liners (type G07.A) conductor diameter to be confirmed.
Maximum safety load: 50 kN
Minimum breaking load: 150 kN
Weight: 7 kg

3105.1

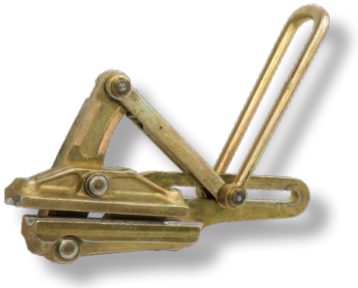

Self-gripping clamps fit for:
- aluminium, ACSR and ACCC, copper conductor: 8-38 mm
- steel conductor and ground wire: 8-22 mm
- jaws length: 272 mm
- steel rope: 8-24 mm

Interchangeable liners (type G05.A) conductor diameter to be confirmed.
Maximum safety load: 75 kN
Minimum breaking load: 225 kN
Weight: 15 kg

3104.1

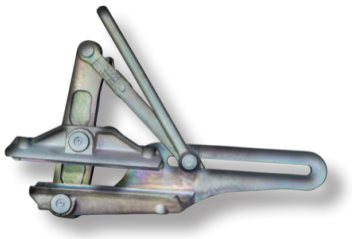

Self-gripping clamps fit for:
- aluminium, ACSR and ACCC, copper conductor: 30-45 mm
- jaws length: 282 mm
- steel rope: 16-28 mm

Interchangeable liners (type G04.A) conductor diameter to be confirmed.
Maximum safety load: 91 kN
Minimum breaking load: 285 kN
Weight: 17 kg

3104.1.L

Self-gripping clamps fit for:
- aluminium, ACSR and ACCC, copper conductor: 23-46 mm
- jaws length: 280 mm

Interchangeable liners (type G04.A) conductor diameter to be confirmed.
Maximum safety load: 91 kN
Minimum breaking load: 320 kN
Weight: 18 kg

3112.1

Self-gripping clamps fit for:
Ground wires with optical fiber (OPGW) with external diameter 6-23 mm
Interchangeable liners (type G12TA.1)
Maximum safety load: 49 kN
Minimum breaking load: 180 kN
Weight: 7 kg
G12TA.1 Interchangeable liners in adiprene and aluminium, on demand according to OPGW diameter

Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.