F155.B MAX LOAD 40 TO 70 KN

- Suitable for conductor wooden drums or reels for aerial stringing operations and underground cabling
- Made in steel with foldable structure for ease of transport
- Drum lifting system by hydraulic jacks
- N°2 mechanical disc brakes to control and adjust the torque force pull, with replaceable brake pads
- Steel shaft on ball-bearings with adjustment wedges

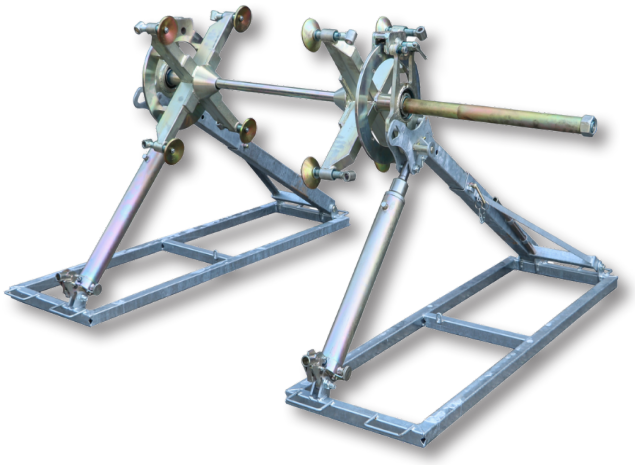

OPTIONAL DEVICES

410.3	No. 1 or 2 disc brakes with hydraulic clamp controlled by manual pump
402.2	Mechanical safe-stops mounted on the jack arm

	Max load of the pair of reel-stands	Reel diameter min-max (*)	Reel max width	Spindle diameter	Braking torque with 2 brakes	Braking torque with 2 brake opt. 410.3	Dimensions of each reel-stand	Weight of the pair of reel-stands (²)
	daN	m	m	mm	daN m	daN m	m (LxW)	kg
F155.040.B	4000	0,8 - 2,8	1,4	40	100	150	1,8 x 0,50	230
F155.070.B	7000	1,0 - 2,8	1,5	40	100	150	2,0 x 0,50	280

(*) on demand we can supply stands fit for reels with bigger diameter
(²) weight of a pair of standard stands, with no optional devices

Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.