MAST 131.6

Mast for wire management during installation, equipped with 6 horizontal nylon rollers and 4 vertical nylon rollers to guide a single wire. Specifically used for recovery operations of the existing cable.

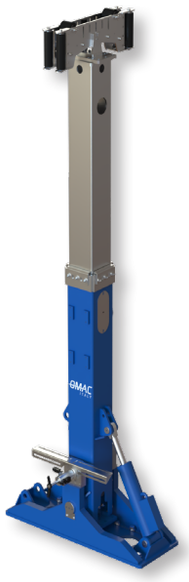

MAST DIMENSIONS

HEIGHT (closed)	2655 mm
HEIGHT (open)	3450 mm
TILTING	± 400 mm

CONFIGURATION

- Main structure made of galvanized steel complete with base-frame for the attachments for the mast
- Mast equipped with sensors to ensure the correct tilting and the correct deployment of the mast during the transport to increase safety onsite and during the transport
- Mast supplied also as a stand-alone machine complete with its own electrical panel, hydraulic system, control valves, and base frame
- Mast equipped with nylon guide rollers to ensure smooth sliding of the cable/contact wire

OPTIONAL DEVICES

QE	Electric power supply (12 or 24 Vdc), supplied by the customer. (please confirm 12 or 24 Vdc)
MO	Electro-Hydraulic control valve complete with hoses. Feeding Pump and Electric Control Unit - Not included
131.4	Base frame for MAST Dimensions to be specify . Max Width 2000/2300 mm Max Length 1300/1500 mm
093.2	Protective barriers
038.9.A.1	Radio remote control for telescopic mast operations with 10 meters back up cable
037	Remote control by cable, with 10 m of cable

Performances of the machine without optional devices, at sea level and temperature 20°C.
Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.