F149.80.95.E

Five-sheave block fit for stringing a pilot rope by helicopter. Proper devices allow to position the pulling rope in the sheave groove, and keep it inside the groove during stringing operations. Aluminium sheave mounted on waterproof bearings. Groove lined with nylon sectors. Galvanized steel frame. Fix attachment.

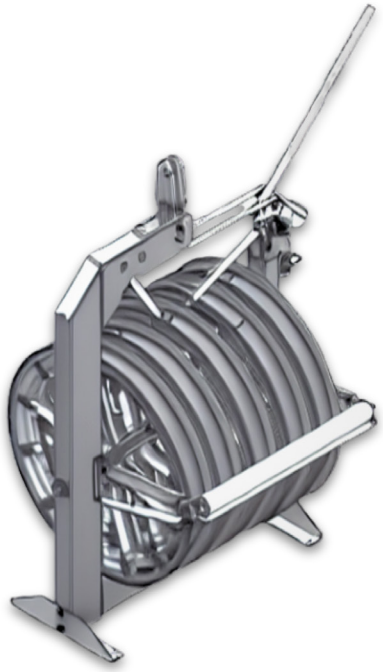

OPTIONAL DEVICES

314 Sheaves lined with aluminium sectors
326 Grounding device (opt.314 needed)
329 Copper cable, 6-m long, with transparent PVC protection, with a clamp for tower and a terminal for the running out block (opt.326)

	Dimensions (mm)										W.L.L	Weight
	A	B	C	D	E	F	G	H	I	L	kN	kg
F149.80.95.E	26	25	693	770	68	175	145	1054	910	1698	60	310

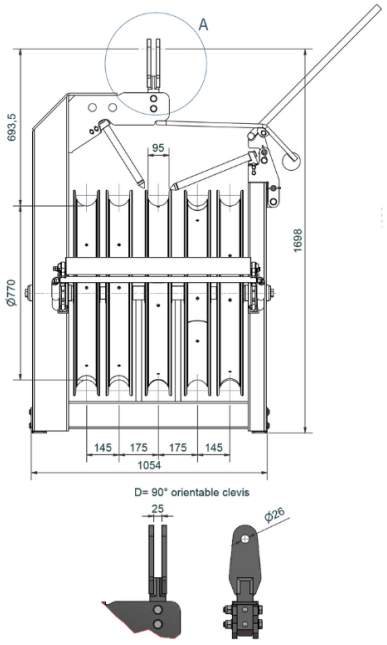

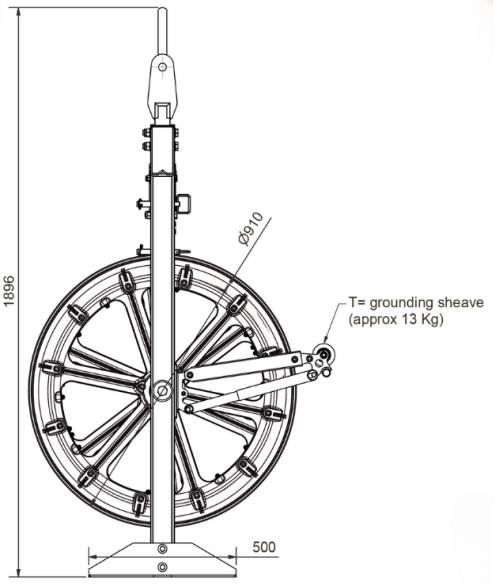

Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.