

C28.10.FS



Self-gripping clamps fit for:

- Guy wire, isolated cable, wire rope and copper cable
- Diameter: Ø 5-22 mm
 Maximum safety load: 20 kN
 Jaws length: 90 mm
 Weight: 1,6 kg
 Dimensions: 280 x 160 mm


C28.11.FS



Self-gripping clamps fit for:

- Guy wire, isolated cable, wire rope and copper cable
- Diameter: Ø 6-22 mm
 Maximum safety load: 30 kN
 Jaws length: 90 mm
 Weight: 1,8 kg
 Dimensions: 280 x 160 mm

C28.12.FS

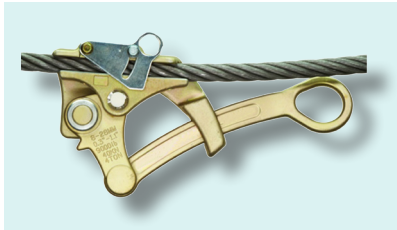

Self-gripping clamps fit for:

- Guy wire, isolated cable, wire rope and copper cable
- Diameter: Ø 8-28 mm
 Maximum safety load: 40 kN
 Jaws length: 140 mm
 Weight: 3,5 kg
 Dimensions: 340 x 200 mm


C26.10.ABC



Self-gripping clamps fit for:

- Cable: 2 x 16 mm² / 2 x 50 mm²
 4 x 16 mm² / 4 x 35 mm²
- Maximum safety load: 3,5 kN
 Dimensions: 250 x 150 mm
 Weight: 0,6 kg
 Aluminium jaws lined with high grip material (jaws length 80 mm)


C26.11.ABC

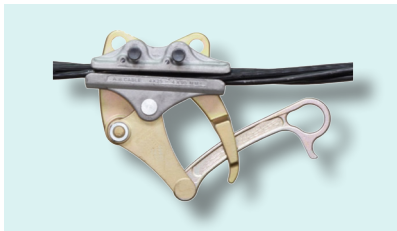

Self-gripping clamps fit for:

- Cable: 4 x 25 mm² and 4 x 95 mm²
- Maximum safety load: 10 kN
 Dimensions: 300 x 150 mm
 Weight: 2,4 kg
 Aluminium jaws lined with high grip material (jaws length 160 mm)

C26.12.ABC

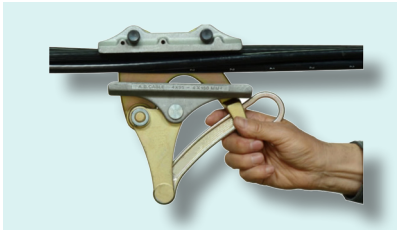

Self-gripping clamps fit for:

- Cable: 4 x 95 mm² and 4 x 150 mm²
- Maximum safety load: 18 kN
 Dimensions: 320 x 160 mm
 Weight: 2,6 kg
 Aluminium jaws lined with high grip material (jaws length 180 mm)

Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.