


F127

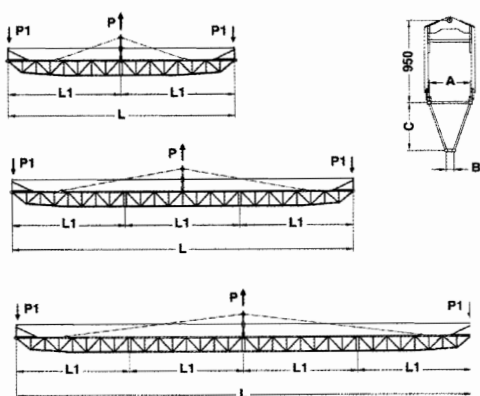


Suspension platform for overhead line works. Aluminium alloy structure.
Made of two or more trapezoidal sections, with central fitting and lateral hooks for anchoring.
Complete with galvanized steel lifeline (anti-fall barrier).


OPTIONAL DEVICES

- 701 Trolley for press, swivelling 360°
- 703 Rail for press-trolley
- 704.1 Additional anti-fall barrier

On demand, we build suspension platforms with higher capacities or different lengths

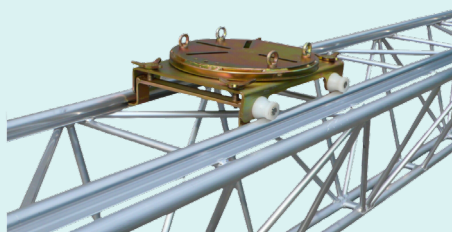

Opt. 701
and 703

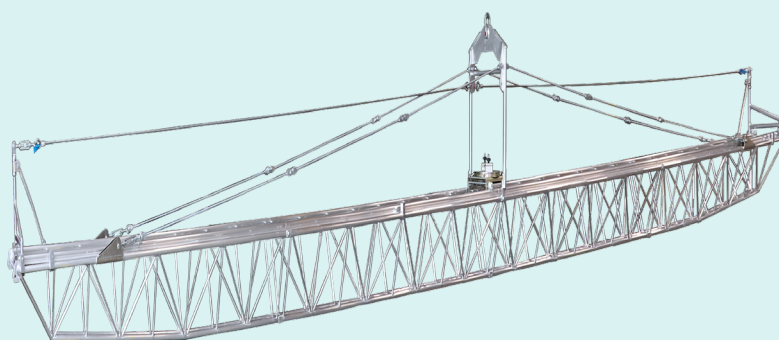

	Total length L	Length of each section L1	Working load P (max P1=300 daN)	Breaking load	Dimensions (mm)			Weight
	m	m	daN	daN	A	B	C	kg
F127.4	4	4	600	1800	350	85	390	50
F127.5	5	5	600	1800	350	85	390	56
F127.6	6	6	600	1800	350	85	390	62
F127.6.2	6	3+3	600	1800	350	85	390	65
F127.7.2	7	3,5+3,5	600	1800	350	85	446	77
F127.8.2	8	4+4	600	1800	350	85	446	86
F127.10.3	10	4+2+4	600	1800	350	85	446	103
F127.12.3	12	4+4+4	600	1800	350	85	446	115
F127.14.3	14	5+4+5	600	1800	350	85	446	126
F127.16.4	16	4+4+4+4	600	1800	350	85	446	144
F127.18.3	18	6+6+6	600	1800	350	85	446	160
F127.20.4	20	5+5+5+5	600	1800	450	85	550	200
F127.24.4	24	6+6+6+6	600	1800	450	85	556	254

Dimensions and weights are without optional devices. All data may change without notice. Images and drawings are indicative only.